

Frequently Asked Questions

Rev A

For Series:	EC29	EC39	EB16E2	EC59
	EC27	EC37	EB15E2	EC57
	EC26	EC36	EB13E2	EC56
	EC25	EC35		

Click on a Question to jump down to the corresponding Answer.

1. [What are these oscillator series?](#)
2. [What are the typical oscillator customer circuit applications for these oscillator series?](#)
3. [What are the typical applications and end-item products for these series?](#)
4. [What commercial benefits do these product series offer?](#)
5. [What technical benefits do these product series offer?](#)
6. [What output frequencies can I obtain for these product series?](#)
7. [What are the package dimensions for these product series?](#)
8. [What are the construction characteristics of these product series?](#)
9. [What are the input voltages for these product series?](#)
10. [What are the input current specifications for these product series?](#)
11. [What are the frequency stability and operating temperature range options for these product series?](#)
12. [Do these series offer a tri-state output function?](#)
13. [Do these series offer a stand-by function?](#)
14. [Can I obtain a non-tri-state function for these product series?](#)
15. [How do I specify the overall frequency stability for these product series?](#)
16. [What is oscillator aging and what are the aging specifications for these product series?](#)
17. [What are the period jitter characteristics for these product series?](#)
18. [What are the rms phase jitter and phase noise characteristics for these product series?](#)
19. [Is tight duty cycle \(symmetry\) available for these product series?](#)

20. [What are the output and output load characteristics for these product series?](#)
21. [Is start-up time specified for these product series?](#)
22. [How do I electrically test these product series at my facility?](#)
23. [Are these product series compatible with my existing assembly process equipment?](#)
24. [Are these product series compatible with my existing reflow processes?](#)
25. [Are these oscillator series RoHS compliant and Pb-free?](#)
26. [How can I obtain a RoHS compliant \(Pb-free\) certification for these product series?](#)
27. [Are RoHS and RoHS \(Pb-free\) material declaration data available for customer review?](#)
28. [How do I layout my printed circuit board for these product series?](#)
29. [How do I cross these product series with a competitor part number?](#)
30. [What information is needed to obtain a quote for these product series?](#)
31. [How do I obtain a PDF copy of the product series data sheet?](#)
32. [How do I obtain a PDF copy of the specification data sheet for a specific part number?](#)
33. [Who do I contact if I have additional technical questions about the use of these product series?](#)
34. [How do I order an oscillator that has custom requirements not specified on the standard oscillator series datasheet?](#)
35. [What are the environmental and mechanical specifications for these product series?](#)
36. [What reliability information is available these product series?](#)
37. [Is thermal resistance information available for these product series?](#)
38. [Is IBIS model information available for these product series?](#)
39. [What is the marking scheme for these product series?](#)
40. [Where can I get the information regarding discontinued or End of Life products?](#)
41. [Is Ecliptek ISO 9000 Certified?](#)

1. What are these oscillator series?

These series of oscillators are devices where the output frequency is primarily controlled by an internal quartz bulk acoustic wave (BAW) crystal resonator and an integrated complementary metal-oxide-semiconductor logic (CMOS) oscillator circuit. Utilizing a proprietary crystal resonator design and exclusive oscillator design techniques, these series of oscillators are calibrated to a specified frequency prior to shipment to the customer.

[Back to Top](#)

2. What are some of the typical oscillator customer circuit applications for these series?

These oscillator series can be used in any of the following applications:

- Clock Recovery
- Phase-Locked Loop and Frequency Synthesis
- Synthesizer or System Reference
- Clock Distribution
- Clock Translation and Multiplexing

[Back to Top](#)

3. What are some the typical applications and end item products for these series?

Here is a list of the common applications and products:

- PCI Express
- Gigabit Ethernet
- Fiber Channel
- SATA/SAS
- FBDIMM, DDR, SONET, ATM, SDH
- Routers, Servers, Hubs, and Network Switches
- High Resolution Video, and Set-top Boxes
- Scanners, Printers, Modems
- LCD Displays and HDTV
- Interface Controllers
- Medical Equipment
- PDAs and Portable Media Players
- Digital Cameras and Gaming Products
- Notebook Computers
- Video Cameras and Video Recorders
- Portable Devices
- Computer Peripherals and Networking Products

[Back to Top](#)

4. What commercial benefits do these product series offer?

These series of oscillators have industry standard packaging, competitive lead times, and cost effective pricing.

[Back to Top](#)

5. What technical benefits do these product series offer?

These series of crystal oscillators offer:

- Improved frequency stability through the use of a bulk acoustic wave (BAW) quartz crystal resonator
- Use of Fundamental and Third Overtone Mode ASIC design, no internal PLL
- Output frequencies up to 200.000MHz
- Supply voltage operation at 1.8V_{DC}, 2.5V_{DC}, 3.3V_{DC}, 5.0V_{DC}
- ±20ppm, ±25ppm, ±50ppm, or ±100ppm maximum frequency stability options
- Commercial and industrial operating temperature range options
- Tight duty cycle option of 50% ±5%
- Superior rms phase jitter and phase noise performance
- Tri-state high impedance output
- High speed CMOS output with controlled rise and fall times
- Four industry standard 4 pad SMD packages
- Low stand-by current
- Low profile ceramic MSL1 rated SMD packages
- RoHS Compliant (Pb-free) with high temperature 260°C reflow capability

[Back to Top](#)

6. What output frequencies can I obtain for these product series?

These series feature frequencies ranging from 1.544MHz to 200.000MHz.

[Back to Top](#)

7. What are the package dimensions for these product series?

These series of oscillators are offered in four industry standard ceramic four pad SMD packages. The table below outlines the series product offerings and their respective packages.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see package dimensions

[Back to Top](#)

8. What are the construction characteristics of these product series?

These product series consist of a single CMOS ASIC and a fundamental or third overtone mode BAW quartz crystal packaged inside a hermetically sealed ceramic leadless SMD package. The leadless SMD package has four gold plated contact I/O pads. The package has a seam sealed metal cover that is case grounded for improved EMI performance.

[Back to Top](#)

9. What are the input voltages for these product series?

These product series offer operation at 1.8V_{DC}, 2.5V_{DC}, 3.3V_{DC}, and 5.0V_{DC}. Please contact the [engineering staff](#) at Ecliptek if you have other supply voltage needs.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see supply voltage specifications

[Back to Top](#)

10. What are the input current specifications for these product series?

The input current specification is listed in milliamps as a maximum value on the respective datasheet. These current ratings are for oscillators with the output load termination current included.

[Back to Top](#)

11. What are the frequency stability and operating temperature range options for these product series?

Ecliptek offers ± 20 ppm, ± 25 ppm, ± 50 ppm or ± 100 ppm frequency stability options for these product series. These frequency stability options apply to a 0°C to $+70^{\circ}\text{C}$ or -10°C to $+70^{\circ}\text{C}$ commercial temperature range or a -20°C to $+70^{\circ}\text{C}$ extended commercial temperature range or a -40°C to $+85^{\circ}\text{C}$ industrial operating temperature range. The available operating temperature range and frequency stability options can be found on the respective datasheet.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see frequency stability and operating temperature range options

[Back to Top](#)

12. Do these series offer a tri-state output function?

These product series offer a tri-state output function to facilitate the customer's use of in-process assembly testing or for the use of multiple clocks on the same node. They feature a tri-state output control option on pad one (1) where the output is three-stated (tri-state condition) when the voltage at the control pad is set to a logic low state. In this condition (see figure below), the oscillator output buffer circuitry within the oscillator is shut down and the output pad is placed into a high impedance state. If the voltage at the control pad is set to no connect or a logic high state, the output is enabled (clocking).

Note: The oscillator has an internal pull up resistor on the control pad. The respective series datasheet provides the V_{IH} and V_{IL} thresholds for control of the tri-state function.

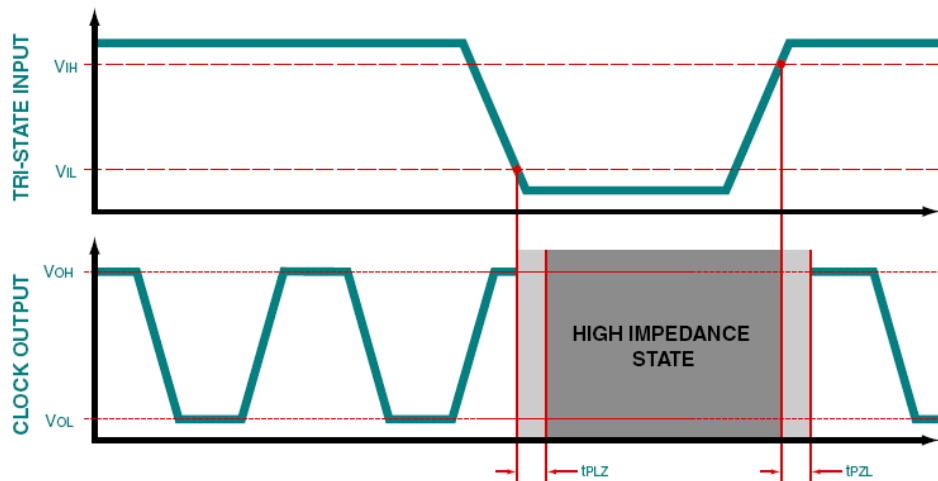


Figure: Tri-State Timing Diagram

When entering the tri-state mode, the time from when the oscillator pad one input control reaches V_{IL} and the oscillator output pad becomes high impedance is shown as t_{PLZ} . When exiting the tri-state mode, the time from when the oscillator pad one input control reaches V_{OH} and the oscillator output begins clocking is shown as t_{PZL} . For these series, characterization test data indicates that t_{PLZ} is approximately 50nS and t_{PZL} is approximately 2 to 3mS.

[Back to Top](#)

13. Do these series offer a stand-by function?

All of the 1.8V_{DC}, 2.5V_{DC} and 3.3V_{DC} oscillator series (excluding the 5.0V series) contain a stand-by function for power management. All active circuitry within the oscillator is shut down when the voltage at the control pad is set to a logic low state. In this condition, the output signal is three-stated (tri-state). The oscillator output gate becomes high impedance and the oscillator input current on the power supply line is negligible. The maximum stand-by current is listed on the respective series datasheet.

[Back to Top](#)

14. Can I obtain a non-tri-state function for these product series?

These series of product only offers a tri-state option on pad one of the oscillator. The customer can use these oscillator series as a non-tri-state oscillator by setting the voltage on tri-state control (pad 1) to either no connect or logic high. The oscillator has an internal pull up resistor on tri-state control (pad 1). The respective series datasheet provides the V_{IH} and V_{IL} thresholds for control of the tri-state function.

[Back to Top](#)

15. How do I specify the overall frequency stability for these product series?

Ecliptek defines the frequency stability performance of the device inclusive of specific oscillator operating conditions. This is often called the "Inclusive Method". Ecliptek specifies the following parameters for this series of product:

- Calibration Frequency Tolerance at 25°C
- Frequency Stability over Operating Temperature Range
- Supply Voltage
- Output Load
- First Year Aging at 25°C
- 260°C Reflow
- Shock and Vibration

[Back to Top](#)

16. What is oscillator aging and what are the aging specifications for these product series?

Aging is the systematic change in frequency with time due to internal changes in the crystal and/or oscillator. Aging is often expressed as a maximum value in parts per million per year [ppm/year]. The rate of aging is logarithmic in nature. The following factors effect oscillator aging: adsorption and desorption of contamination on the surfaces of the quartz, stress relief of the mounting and bonding structures, material outgassing, and seal integrity. At a rated operating temperature of 25°C, these series of products typically age at a rate of less than ± 3.0 ppm over the first year, and less than ± 1.0 ppm over the following year, logarithmically declining each year thereafter. As shown on the respective series datasheet, Ecliptek specifies the aging parameter of the device inclusive of the overall oscillator operating conditions.

[Back to Top](#)

17. What are the period jitter characteristics for these product series?

Jitter is a time domain measurement and is typically specified in picoseconds (pSec). Ecliptek uses a proprietary oscillator design, exclusive processing methods, and a unique output driver circuit enabling these oscillator series to have exceptionally low period jitter. Please contact the [engineering staff](#) at Ecliptek for period jitter characterization information.

[Back to Top](#)

18. What are the rms phase jitter and phase noise characteristics for these product series?

RMS Period Jitter is a time domain measurement and is specified in picoseconds (pSec) as a maximum value. Phase noise is a measure in the frequency domain and is specified in decibels at various offset points from the carrier (-dBc/Hz). Phase jitter, (often called offset jitter) is derived from the phase noise measurement of the spectral density over a given offset bandwidth. Ecliptek uses a proprietary design, exclusive processing methods, and a unique ASIC output driver circuit enabling these product series to have exceptionally low phase jitter and phase noise. The rms phase jitter parameter can be found on the respective series datasheet. Please contact the [engineering staff](#) at Ecliptek for phase noise characterization information.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see rms phase jitter specifications

[Back to Top](#)

19. Is tight duty cycle (symmetry) available for these product series?

Tight duty cycle (45% minimum, 55% maximum) is available for these product series. See the respective datasheet for measurement thresholds and load conditions.

[Back to Top](#)

20. What are the output and output load characteristics for these product series?

Ecliptek offers these product series with a low voltage high speed CMOS driver that enables the output signal to swing from ground to V_{DD}. The oscillator output topology is designed so as to optimize circuit load matching and signal performance. Signal integrity is optimized when the low impedance output of the oscillator is driving a high impedance-low capacitance input. The output load specification is listed on the applicable datasheet. If a customer requires a different load from that specified on the datasheet, shapes), [please contact Ecliptek](#) with your custom requirements.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A


Table: Click on a series to see the output load

[Back to Top](#)

21. Is start-up time specified for these product series?

As shown in the figure below, start-up time is defined as the time from when the power supply reaches its specified V_{IH} value to the time the oscillator output signal amplitude reaches its steady state V_{OH} output logic high level and the output is within the specified frequency tolerance.

Figure: Oscillator Start-up Timing Diagram

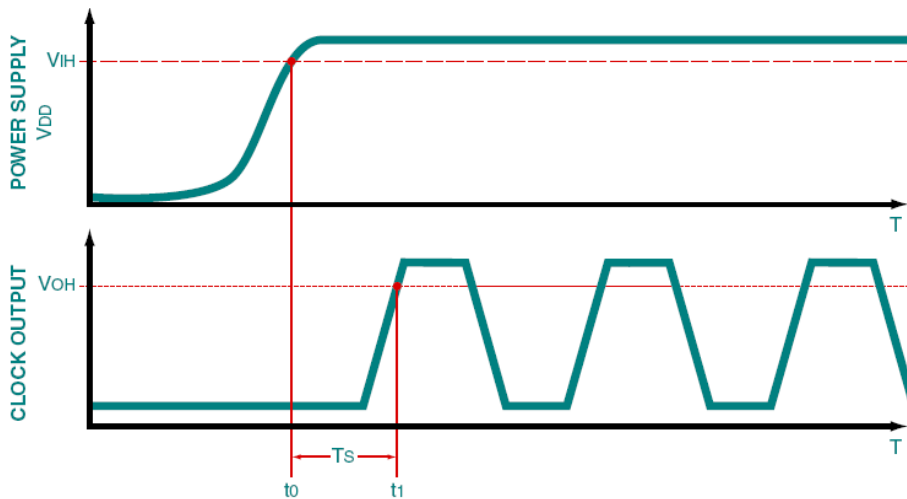

Note: In order to ensure proper start-up, the power supply start-up should have an exponential curve typical of a capacitive charge or a linear voltage ramp. If you have a special voltage start-up profile (i.e. odd ramp steps or shapes), [please contact Ecliptek](#) to discuss possible oscillator performance issues. For these series, characterization test data indicates that the start-up time is typically around 2 to 3mS. The maximum start-up time specification for these series can be found on the series datasheet.

[Back to Top](#)

22. How do I electrically test these product series at my facility?

See the below table for the recommended electrical test fixture.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see recommended electrical test fixture

[Back to Top](#)

23. Are these product series compatible with my existing assembly process equipment?

If the part number is specified with the TR packaging option (tape and reel packaging), oscillator products are delivered to the customer in EIA481A compliant tape and reel packaging. Without the TR option, products are delivered to the customer in bulk packaging (ESD protective bag). See the table below for the carrier tape and reel dimensions.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see recommended packaging methods

[Back to Top](#)

24. Are these product series compatible with my existing reflow processes?

These product series are capable of withstanding industry standard high temperature (260°C, 10 seconds) convection reflow processes and are rated MSL1 per J-STD-020. See the below table for the recommended solder reflow diagram.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see recommended solder reflow methods

[Back to Top](#)

25. Are these product series RoHS compliant and Pb-free?

These products are RoHS compliant and Pb-free as defined in the [Ecliptek RoHS Compliant \(Pb-free\) Roadmap](#).

[Back to Top](#)

26. How can I obtain a RoHS compliant (Pb-free) certification for these product series?

A RoHS and Pb-free product certification letter can be obtained directly from our website by using the [Ecliptek RoHS/Pb-Free Certification Letter Generator](#).

[Back to Top](#)

27. Is RoHS and RoHS (Pb-free) material declaration data available for customer review?

Ecliptek can provide [Material Declaration](#) data in compliance with IPC-1752 to assist customers with their RoHS Compliance (Pb-free) requirements.

[Back to Top](#)

28. How do I layout my printed circuit board for these product series?

The customer should layout their PCB to include proper connections for the tri-state control input function (pad 1). See the below table for the recommended solder pad layout.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see recommended solder pad layout diagram

[Back to Top](#)

29. How do I cross these product series with a competitor part number?

Please see the [Ecliptek Cross Reference by Competitor Part Number](#).

[Back to Top](#)

30. What information is needed to obtain a quote for these product series?

Obtaining a quote on-line is simple. Fill in the required information in the part number constructor for the specific series that you would like to order. This part number will define the specifications you desire. After you construct a part number, you can request a quote or check stock by following the prompts on our website.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to go to part number constructor

[Back to Top](#)

31. How do I obtain a PDF copy of the product series data sheet?

You can go to the specific series you require now by selecting a link from the table below.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to open the PDF datasheet

[Back to Top](#)

32. How do I obtain a PDF copy of the specification data sheet for a specific part number?

Simply complete the required information in the part number constructor for the specific series that you would like to order. After you construct the part number, you will be prompted with an icon labeled “View Datasheet”. Click on this icon and you can download and save a PDF copy of the specific Ecliptek part number you created.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see the part number constructor

[Back to Top](#)

33. Who do I contact if I have additional technical questions about the use of these product series?

The [engineering staff](#) at Ecliptek can provide applications engineering support or answer customer technical questions.

[Back to Top](#)

34. How do I order an oscillator that has custom requirements not specified on the standard oscillator series specification sheet?

Complete the Ecliptek [Custom Oscillator Request Form](#) from our website. From this page you will be able to enter custom specifications that are unavailable from the standard part number constructor forms. These parameters will be sent to our Engineering team where they will be evaluated. Upon review, you will be contacted by our Sales or Engineering team.

[Back to Top](#)

35. What are the environmental and mechanical specifications for these product series?

The environmental and mechanical specifications for these product series is listed on the specification datasheet and is outlined in the table below.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to see the mechanical and environmental specifications

[Back to Top](#)

36. What reliability information is available for these product series?

Failure in Time (FIT) and Mean Time To Failure (MTTF) reliability data is available for these product series as provided in the below table.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to open the Qualification and Reliability Report in PDF

[Back to Top](#)

37. Is thermal resistance information available for these product series?

θ_{JA} and θ_{JC} values are available for these product series. Please see the [Oscillator Thermal Resistance](#) information provided.

[Back to Top](#)

38. Are IBIS models available for these product series?

IBIS modeling information is available for some of these product series as provided in the below table.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	N/A	N/A	N/A	N/A
2.5	N/A	N/A	N/A	N/A
3.3	EC26	EC36	N/A	N/A
5.0	EC25	EC35	N/A	N/A

Table: Click on the series to open the IBIS Model document

[Back to Top](#)

39. What is the marking scheme for these product series?

As shown on the applicable datasheet, these series of product have marking content on the top of the part. This marking consists of a pad one (1) locator dot and additional lines of alpha numeric marking. See the respective datasheet for marking content as outlined in the table below.

Supply Voltage (V _{DC})	Package Dimensions (all dimensions in millimeters)			
	5 x 7	3.2 x 5	2.5 x 3.2	2 x 2.5
1.8	EC29	EC39	EB16E2	EC59
2.5	EC27	EC37	EB15E2	EC57
3.3	EC26	EC36	EB13E2	EC56
5.0	EC25	EC35	N/A	N/A

Table: Click on a series to go to the marking content

[Back to Top](#)

40. Where can I get the information regarding discontinued or End of Life (EOL) products?

Any Ecliptek part number currently under an End of Life statement will be identified as EOL on Ecliptek's Quotation, along with a link to the EOL statement. This information can also be found on the [End of Life Statements for Discontinued and Obsolete Products](#) section of our website.

[Back to Top](#)

41. Is Ecliptek ISO 9000 Certified?

Yes, Ecliptek is certified to [ISO 9001](#).