


# EL13C5 Series



- Crystal Clock Oscillators
- LVDS Output
- +3.3V Supply Voltage
- Complementary Output
- Tri-State Output Function
- 6 Pad Ceramic SMD Package
- Low Stand-by Current
- RoHS Compliant (Pb-Free)

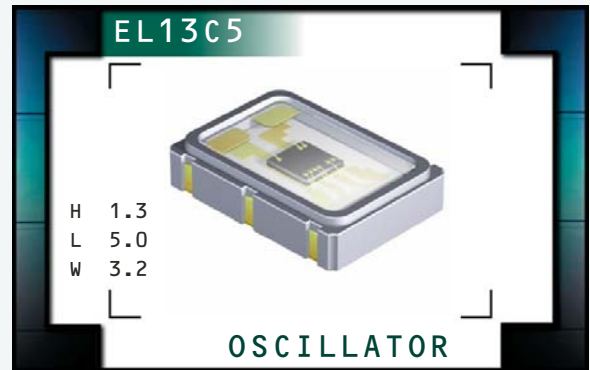

## ELECTRICAL SPECIFICATIONS

|                         |   |
|-------------------------|---|
| Nominal Frequency (MHz) | 80MHz, 80.157MHz, 85MHz, 87.125MHz, 90MHz, 100MHz, 106.25MHz, 110MHz, 119MHz, 120MHz, 122.888MHz, 124.4MHz, 125MHz, 127MHz, 128MHz, 131.072MHz, 133MHz, 133.33MHz, 133.333MHz, 135MHz, 137.472MHz, 150MHz, 155.52MHz, 156.25MHz, 159.375MHz, or 161.1328MHz |
|-------------------------|---|

|                             |                                 |
|-----------------------------|---------------------------------|
| Operating Temperature Range | 0°C to +70°C, or -40°C to +85°C |
|-----------------------------|---------------------------------|

|                           |                 |
|---------------------------|-----------------|
| Storage Temperature Range | -55°C to +125°C |
|---------------------------|-----------------|

|                             |                        |
|-----------------------------|------------------------|
| Supply Voltage ( $V_{CC}$ ) | 3.3V <sub>DC</sub> ±5% |
|-----------------------------|------------------------|

|               |              |
|---------------|--------------|
| Input Current | 66mA Maximum |
|---------------|--------------|

|                                 |   |  |
|---------------------------------|---|--|
| Frequency Tolerance / Stability | Inclusive of All Conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging at 25°C, Shock, and Vibration | ±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum |
|---------------------------------|---|--|

|  |   |
|--|---|
| Output Voltage Logic High ( $V_{OH}$ ) | 1.43V <sub>DC</sub> Typical, 1.6V <sub>DC</sub> Maximum |
|--|---|

|                                       |  |
|---------------------------------------|--|
| Output Voltage Logic Low ( $V_{OL}$ ) | 1.1V <sub>DC</sub> Typical, 0.9V <sub>DC</sub> Minimum |
|---------------------------------------|--|

|  |   |
|--|---|
| Differential Output Voltage ( $V_{OD}$ ) | 247mV Minimum, 330mV Typical, 454mV Maximum |
|--|---|

|                             |  |
|-----------------------------|--|
| Offset Voltage ( $V_{OS}$ ) | 1.125V Minimum, 1.250V Typical, 1.375V Maximum |
|-----------------------------|--|

|                       |                        |                                  |
|-----------------------|------------------------|----------------------------------|
| Rise Time / Fall Time | 20% to 80% of waveform | 300pSec Typical, 700pSec Maximum |
|-----------------------|------------------------|----------------------------------|

|  |              |
|--|--------------|
| Differential Output Error ( $_{D}V_{OD}$ ) | 50mV Maximum |
|--|--------------|

|            |   |          |
|------------|---|----------|
| Duty Cycle | at 50% of waveform or at the crossing point | 50 ±5(%) |
|------------|---|----------|

|                               |               |
|-------------------------------|---------------|
| Offset Error ( $_{D}V_{OS}$ ) | 150mV Maximum |
|-------------------------------|---------------|

|                                |                 |
|--------------------------------|-----------------|
| Output Swing ( $_{D}VO_{PP}$ ) | 350mVdc Minimum |
|--------------------------------|-----------------|

|                       |   |          |
|-----------------------|---|----------|
| Load Drive Capability | Between Output and Complementary Output | 100 Ohms |
|-----------------------|---|----------|

|                                   |                                    |
|-----------------------------------|------------------------------------|
| Logic Control / Additional Output | Tri-State and Complementary Output |
|-----------------------------------|------------------------------------|

|                         |   |  |
|-------------------------|---|--|
| Tri-State Input Voltage | $V_{IH}$ of 70% of $V_{CC}$ Minimum<br>No Connection<br>$V_{IL}$ of 30% of $V_{CC}$ Maximum | Enables Outputs<br>Enables Outputs<br>Disables Outputs: High Impedance |
|-------------------------|---|--|

|                 |              |              |
|-----------------|--------------|--------------|
| Standby Current | Without Load | 30µA Maximum |
|-----------------|--------------|--------------|

|               |                     |
|---------------|---------------------|
| Start Up Time | 10 mSeconds Maximum |
|---------------|---------------------|

|                  |                     |                                 |
|------------------|---------------------|---------------------------------|
| RMS Phase Jitter | FJ = 12kHz to 20MHz | 0.4pSec Typical, 1 pSec Maximum |
|------------------|---------------------|---------------------------------|

|                     |               |  |
|---------------------|---------------|--|
| Typical Phase Noise | Fo=156.250MHz | -60dBc/Hz at 10Hz Offset<br>-95dBc/Hz at 100Hz Offset<br>-125dBc/Hz at 1kHz Offset<br>-143dBc/Hz at 10kHz Offset<br>-145dBc/Hz at 100kHz Offset<br>-145dBc/Hz at 1MHz Offset<br>-146dBc/Hz at 10MHz Offset |
|---------------------|---------------|--|

|                                |                        |                  |                    |                 |               |                    |
|--------------------------------|------------------------|------------------|--------------------|-----------------|---------------|--------------------|
| MANUFACTURER<br>ECLIPTEK CORP. | CATEGORY<br>OSCILLATOR | SERIES<br>EL13C5 | PACKAGE<br>CERAMIC | VOLTAGE<br>3.3V | CLASS<br>OS6X | REV. DATE<br>12/09 |
|--------------------------------|------------------------|------------------|--------------------|-----------------|---------------|--------------------|

# PART NUMBERING GUIDE

## EL13C5 E 2 F - 155.520M TR

### FREQUENCY TOLERANCE & STABILITY/ OPERATING TEMPERATURE RANGE

C=±100ppm Maximum over 0°C to +70°C  
 D=±50ppm Maximum over 0°C to +70°C  
 E=±25ppm Maximum over 0°C to +70°C  
 F=±20ppm Maximum over 0°C to +70°C  
 G=±100ppm Maximum over -40°C to +85°C  
 H=±50ppm Maximum over -40°C to +85°C  
 J=±25ppm Maximum over -40°C to +85°C

### AVAILABLE OPTIONS

Blank=Bulk  
 TR=Tape & Reel

### FREQUENCY


### LOGIC CONTROL/ADDITIONAL OUTPUT

F=Tri-State and Complementary Output

### DUTY CYCLE


2=50±5(%)

### MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

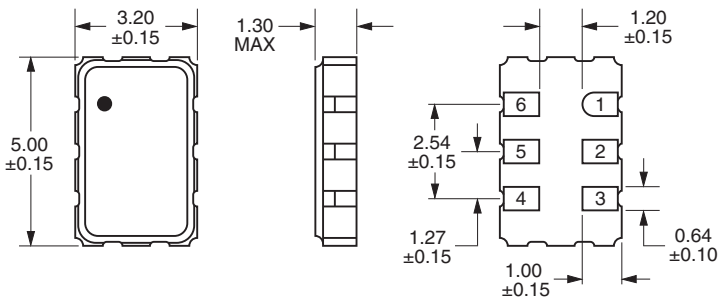


Pin 1: Tri-State  
 Pin 2: No Connect  
 Pin 3: Case Ground  
 Pin 4: Output  
 Pin 5: Complementary Output  
 Pin 6: Supply Voltage

### SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

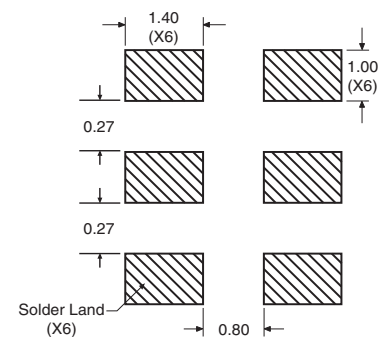


Tolerances=±0.1

### TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

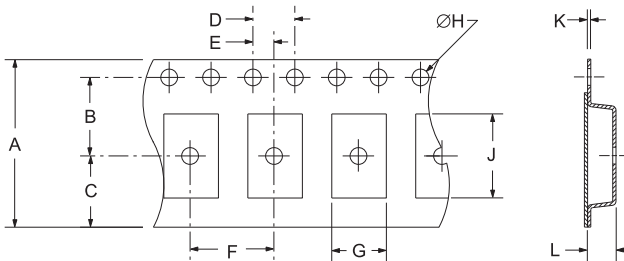

| TAPE | A       | B      | C         | D     | E       |     |
|------|---------|--------|-----------|-------|---------|-----|
|      | 16±.3-1 | 7.5±.1 | 6.75±.1   | 4 ±.1 | 2±.1    |     |
|      | F       | G      | H         | J     | K       | L   |
|      | 8±.1    | B0*    | 1.5 +.1-0 | A0*   | .3 ±.05 | K0* |

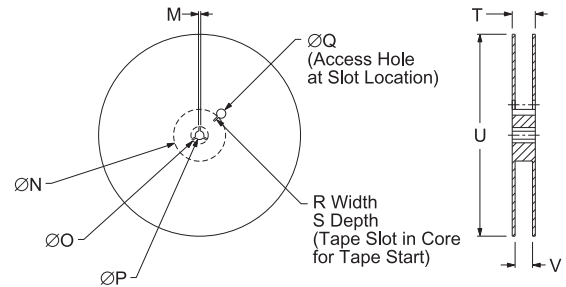

| REEL | M       | N      | O        | P       | Q        |          |
|------|---------|--------|----------|---------|----------|----------|
|      | 1.5 MIN | 50 MIN | 20.2 MIN | 13±.2   | 40 MIN   |          |
|      | R       | S      | T        | U       | V        | QTY/REEL |
|      | 2.5 MIN | 10 MIN | 22.4 MAX | 360 MAX | 16.4+2-0 | 1,000    |

\*Compliant to EIA 481A

### ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

| Characteristic               | Specification                                 |
|------------------------------|---|
| ESD Susceptibility           | MIL-STD-883, Method 3015, Class 1, HBM: 1500V |
| Fine Leak Test               | MIL-STD-883, Method 1014, Condition A         |
| Flammability                 | UL94-V0                                       |
| Gross Leak Test              | MIL-STD-883, Method 1014, Condition C         |
| Mechanical Shock             | MIL-STD-883, Method 2002, Condition B         |
| Moisture Resistance          | MIL-STD-883, Method 1004                      |
| Moisture Sensitivity         | J-STD-020, MSL 1                              |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition K          |
| Resistance to Solvents       | MIL-STD-202, Method 215                       |
| Solderability                | MIL-STD-883, Method 2003                      |
| Temperature Cycling          | MIL-STD-883, Method 1010, Condition B         |
| Vibration                    | MIL-STD-883, Method 2007, Condition A         |

### MARKING SPECIFICATIONS

Line 1: EXX.XXX — Frequency in MHz (5 Digits Maximum + Decimal)

Line 2: XX Y ZZ  
 — Week of Year  
 — Last Digit of Year  
 — Ecliptek Manufacturing Identifier

| MANUFACTURER   | CATEGORY   | SERIES | PACKAGE | VOLTAGE | CLASS | REV. DATE |
|----------------|------------|--------|---------|---------|-------|-----------|
| ECLIPTEK CORP. | OSCILLATOR | EL13C5 | CERAMIC | 3.3V    | OS6X  | 12/09     |