


EMCL12 Series



ECLIPTEK[®]
CORPORATION

- MEMS Clock Oscillators
- LVPECL Output
- +2.5V Supply Voltage
- Complementary Output
- Output Enable and Standby Options
- 6 Pad Plastic SMD Package
- 30,000 G Shock Resistance
- RoHS Compliant (Pb-free)

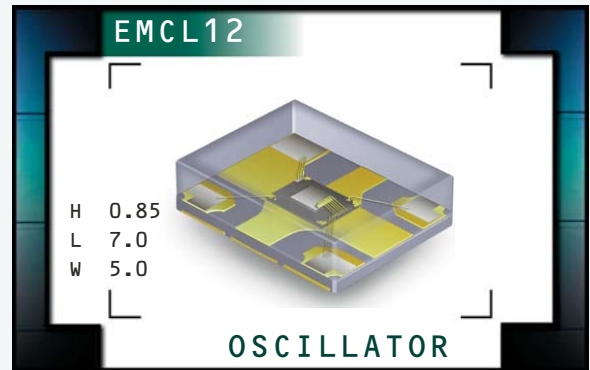

ELECTRICAL SPECIFICATIONS

| | | |
|--|---|--|
| Nominal Frequency (MHz) <i>Some frequencies within this range may not be available</i> | | 1.000MHz to 220.000MHz |
| Operating Temperature Range | | 0°C to +70°C, -20°C to +70°C, or -40°C to +85°C |
| Storage Temperature Range | | -55°C to +125°C |
| Supply Voltage (V_{CC}) | | 2.5V _{DC} ±0.125V _{DC} |
| Input Current | Excluding Load Termination Current | 75mA Maximum |
| Frequency Tolerance / Stability <i>Some tolerance stability options may not be available</i> | Inclusive of All Conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging at 25°C, Reflow, Shock, and Vibration | ±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum |
| Output Voltage Logic High (V_{OH}) | | 1.55V _{DC} Typical, V _{CC} -1.025V _{DC} Minimum |
| Output Voltage Logic Low (V_{OL}) | | 0.80V _{DC} Typical, V _{CC} -1.62V _{DC} Maximum |
| Rise Time / Fall Time | 20% to 80% of waveform | 150pSec Typical, 300pSec Maximum |
| Duty Cycle | at 50% of waveform | 50 ±5(%) |
| Load Drive Capability | | 50 Ohms into V _{CC} -2.0V _{DC} |
| Logic Control / Additional Output | | Output Enable (OE) and Complementary Output, or Standby and (ST) Complementary Output |
| Output Control Input Voltage | V _{IH} of 70% of V _{CC} Minimum No Connection V _{IL} of 30% of V _{CC} Maximum | Enables Outputs Enables Outputs Disables Outputs: High Impedance |
| Output Enable Current | Without Load | 70mA Maximum (OE) |
| Standby Current | Without Load | 30µA Maximum (ST) |
| Aging | First Year at 25°C | ±1ppm Maximum |
| Start Up Time | | 10 mSeconds Maximum |
| Period Jitter | Deterministic Random RMS pk-pk | 0.2pSec Typical 2.0pSec Typical 1.5pSec Typical, 3.0pSec Maximum 20pSec Typical, 25pSec Maximum |
| RMS Phase Jitter (Random) Fj=637kHz to 10MHz | 1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz | 1.7pSec Typical 1.6pSec Typical 1.6pSec Typical |
| RMS Phase Jitter (Random) Fj=1MHz to 20MHz | 1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz | 1.4pSec Typical 1.0pSec Typical 0.7pSec Typical |
| RMS Phase Jitter (Random) Fj=1.875MHz to 20MHz | 1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz | 1.1pSec Typical 0.5pSec Typical 0.4pSec Typical |

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EMCL12

PACKAGE
PLASTIC

VOLTAGE
2.5V

CLASS
OS7P

REV. DATE
10/11

PART NUMBERING GUIDE

EMCL12 C 2 H - 155.520M TR

FREQUENCY TOLERANCE & STABILITY/ OPERATING TEMPERATURE RANGE

C=±100ppm Maximum over 0°C to +70°C
 D=±50ppm Maximum over 0°C to +70°C
 E=±25ppm Maximum over 0°C to +70°C
 F=±20ppm Maximum over 0°C to +70°C
 G=±100ppm Maximum over -40°C to +85°C
 H=±50ppm Maximum over -40°C to +85°C
 J=±25ppm Maximum over -40°C to +85°C
 L=±100ppm Maximum over -20°C to +70°C
 M=±50ppm Maximum over -20°C to +70°C
 N=±25ppm Maximum over -20°C to +70°C

AVAILABLE OPTIONS

Blank=Bulk
 TR=Tape & Reel

FREQUENCY


LOGIC CONTROL/ADDITIONAL OUTPUT

H=Output Enable (OE) and Complementary Output
 J=Standby (ST) and Complementary Output

DUTY CYCLE


2=50±5(%)

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

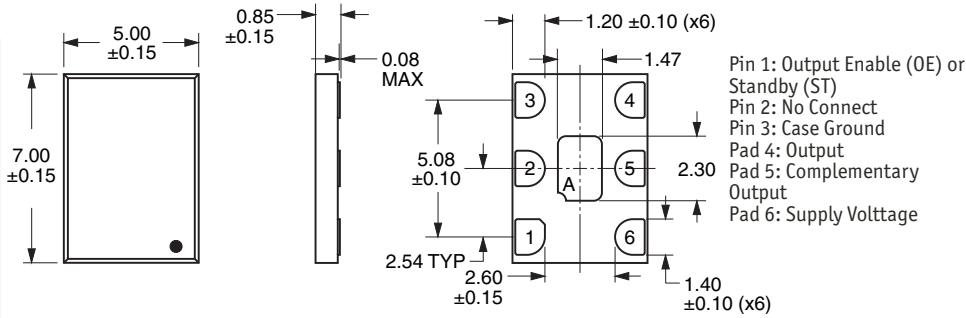


Note A: Center paddle is connected internally to oscillator ground (Pad 3).


SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

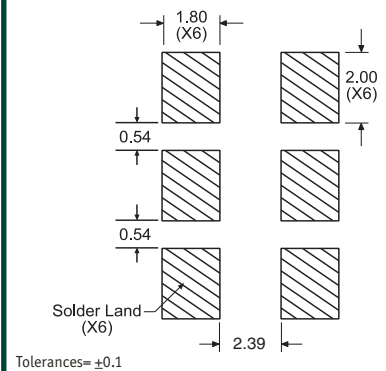

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

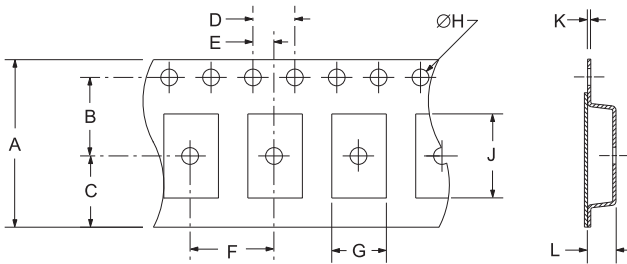

| TAPE | A | B | C | D | E |
|------|---------|-----------|---------|--------|------|
| | 16±.3-1 | 7.5±.1 | 6.75±.1 | 4 ±.1 | 2±.1 |
| F | G | H | J | K | L |
| 8±.1 | B0* | 1.5 +.1-0 | A0* | .3±.05 | K0* |

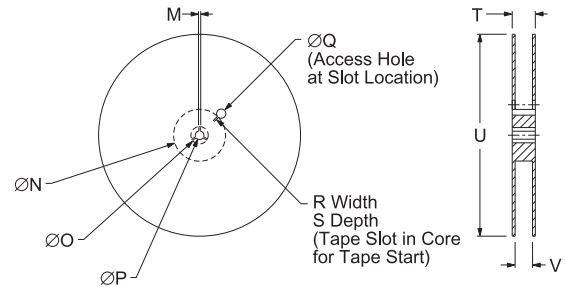

| REEL | M | N | O | P | Q |
|---------|---------|----------|----------|----------|----------|
| | 1.5 MIN | 50 MIN | 20.2 MIN | 13±.2 | 40 MIN |
| R | S | T | U | V | QTY/REEL |
| 2.5 MIN | 10 MIN | 22.4 MAX | 360 MAX | 16.4+2-0 | 1,000 |

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

| Characteristic | Specification |
|------------------------------|---|
| ESD Susceptibility | MIL-STD-883, Method 3015, Class 2, HBM: 2000V |
| Flammability | UL94-V0 |
| Mechanical Shock | MIL-STD-883, Method 2002, Condition G, 30,000G |
| Moisture Resistance | MIL-STD-883, Method 1004 |
| Moisture Sensitivity Level | J-STD-020, MSL 1 |
| Resistance to Soldering Heat | MIL-STD-202, Method 210, Condition K |
| Resistance to Solvents | MIL-STD-202, Method 215 |
| Solderability | MIL-STD-883, Method 2003 (Six I/O Pads on bottom of package only) |
| Temperature Cycling | MIL-STD-883, Method 1010, Condition B |
| Thermal Shock | MIL-STD-883, Method 1011, Condition B |
| Vibration | MIL-STD-883, Method 2007, Condition A, 20G |

MARKING SPECIFICATIONS

Line 1: XXXX or XXXXX

Ecliptek Manufacturing Lot Code

| MANUFACTURER | CATEGORY | SERIES | PACKAGE | VOLTAGE | CLASS | REV. DATE |
|----------------|------------|--------|---------|---------|-------|-----------|
| ECLIPTEK CORP. | OSCILLATOR | EMCL12 | PLASTIC | 2.5V | OS7P | 10/11 |