

Marketing Bulletin

DATE: April 20th, 2010
TO: All Sales Personnel
FROM: Isaac Gonzalez
RE: Product Termination

To all concerned parties,


This bulletin is to notify all customers of the discontinuation of the following Ecliptek series effective April 20th, 2010:

Series	Description	Recommended Replacement
EC13	RoHS Compliant (Pb-free) 3.3V 14 Pin DIP Metal Thru-Hole LVCMOS/TTL Oscillator	EH13
EC13HS	RoHS Compliant (Pb-free) 3.3V 8 Pin DIP Metal Thru-Hole LVCMOS/TTL Oscillator	EH13HS

In compliance with our End of Life (EOL) policy, this will serve as advanced notice of product termination. New orders will not be accepted after September 1st, 2010, with delivery to conclude by December 1st, 2010.

If there are any questions pertaining to this bulletin, please feel free to contact me. Thank you again for your cooperation.

Best Regards,




Isaac Gonzalez
Configuration Manager
Ecliptek Corporation

EC13 Series

- RoHS Compliant (Pb-free)
- LVCMOS/TTL output
- 3.3V supply voltage
- 14 pin DIP package
- Stability to ± 20 ppm
- Custom lead length, gull wing options available



ECLIPTEK[®]
CORPORATION

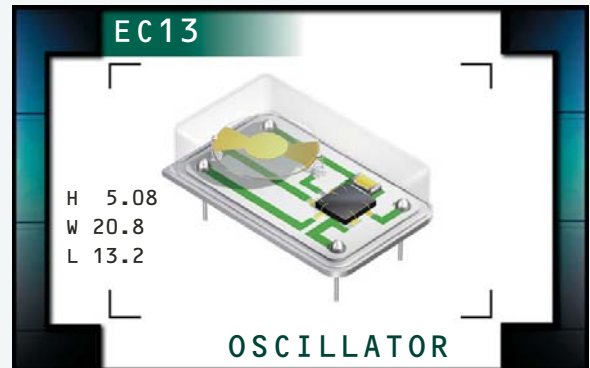

ELECTRICAL SPECIFICATIONS

Frequency Range (MHz)		0.250MHz to 125.000MHz
Operating Temperature Range		0°C to 70°C -40°C to 85°C
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ± 0.3 V _{DC}
Input Current	0.250MHz to 24.000MHz	10mA Maximum
	24.001MHz to 70.000MHz	25mA Maximum
	70.001MHz to 125.000MHz	45mA Maximum
Frequency Tolerance / Stability	Inclusive of all conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, First Year Aging at 25°C, Shock, and Vibration	± 100 ppm, ± 50 ppm, ± 25 ppm, or ± 20 ppm Maximum (0°C to 70°C Only)
Output Voltage Logic High (V_{OH})	w/ TTL Load w/ LVCMOS Load	2.4V _{DC} Minimum 2.7V _{DC} Minimum
Output Voltage Logic Low (V_{OL})	w/ TTL Load w/ LVCMOS Load	0.4V _{DC} Maximum 0.5V _{DC} Maximum
Rise Time / Fall Time	10% to 90% of Waveform w/LVCMOS Load or 0.4V _{DC} to 2.4V _{DC} w/TTL Load	10 nSeconds Max. ≤ 24.000 MHz 10 nSeconds Max. ≤ 24.000 MHz
	10% to 90% of Waveform w/LVCMOS Load 10% to 90% of Waveform w/LVCMOS Load	6 nSeconds Max. 24.000MHz to 70.000MHz 4 nSeconds Max. 70.001MHz to 125.000MHz
Duty Cycle	at 50% of Waveform	50 ± 10 (%) (Standard) or 50 ± 5 (%) (Optional)
Load Drive Capability	≤ 24.000 MHz > 24.000MHz	2TTL or 15pF LVCMOS Load 15pF LVCMOS Load
Tri-State Input Voltage	V _{IH} : No Connection V _{IH} : ≥ 2.2 V _{DC} V _{IL} : ≤ 0.8 V _{DC}	Enables Output Enables Output Disables Output: High Impedance
Aging (at 25°C)		± 5 ppm / year Maximum
Start Up Time		10 mSeconds Maximum
Period Jitter: Absolute		± 100 pSeconds Maximum
Period Jitter: One Sigma		± 25 pSeconds Maximum

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EC13

PACKAGE
14 pin DIP

VOLTAGE
3.3V

CLASS
OS20

REV. DATE
08/06

PART NUMBERING GUIDE

EC13 00 ET T TS - 50.000M - G

FREQUENCY TOLERANCE / STABILITY

00=±100ppm Maximum (Standard)
 45=±50ppm Maximum, 25=±25ppm Maximum
 20=±20ppm Maximum

OPERATING TEMP. RANGE

Blank=0°C to 70°C (Standard), ET=-40°C to 85°C

DUTY CYCLE

Blank=50±10(%) (Standard), T=50±5(%)

AVAILABLE OPTIONS

Blank=None (Standard)
 CLXXX=Custom Lead Length
 G=Full Size Gull Wing


FREQUENCY

OUTPUT CONTROL FUNCTION

Blank = No Connect
 TS=Tri-State Enable High

NOTES


MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

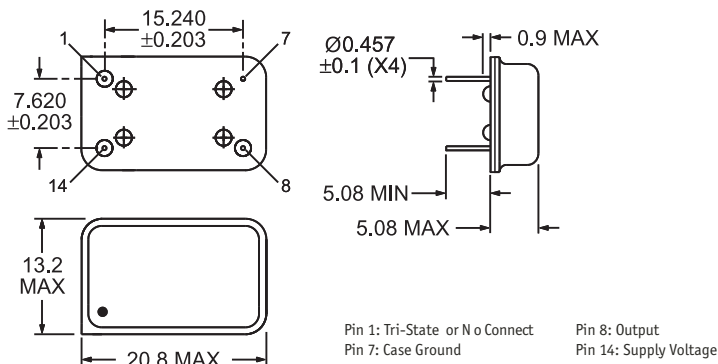

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Lead Integrity	MIL-STD-883, Method 2004
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-883, Method 210
Resistance to Solvents	MIL-STD-883, Method 215

MARKING SPECIFICATIONS

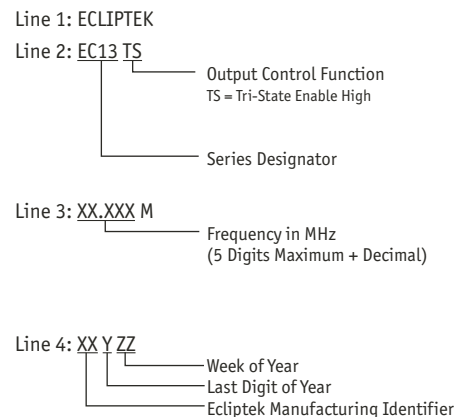

Note: Pin 1 shall be designated with a dot

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EC13	14 pin DIP	3.3V	OS20	08/06