


EMCL13 Series



ECLIPTEK[®]
CORPORATION

- MEMS Clock Oscillators
- LVPECL Output
- +3.3V Supply Voltage
- Complementary Output
- Output Enable and Standby Options
- 6 Pad Plastic SMD Package
- 30,000 G Shock Resistance
- RoHS Compliant (Pb-free)

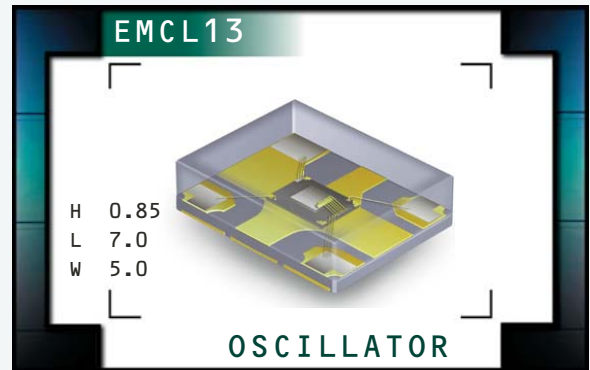

ELECTRICAL SPECIFICATIONS

Nominal Frequency (MHz) <i>Some frequencies within this range may not be available</i>		1.000MHz to 220.000MHz
Operating Temperature Range		0°C to +70°C, -20°C to +70°C, or -40°C to +85°C
Storage Temperature Range		-55°C to +125°C
Supply Voltage (V_{CC})		3.3V _{DC} ±0.3V _{DC}
Input Current	Excluding Load Termination Current	80mA Maximum
Frequency Tolerance / Stability <i>Some tolerance stability options may not be available</i>	Inclusive of All Conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging at 25°C, Reflow, Shock, and Vibration	±100ppm, ±50ppm, ±25ppm, or ±20ppm Maximum
Output Voltage Logic High (V_{OH})		2.35V _{DC} Typical, V _{CC} -1.025V _{DC} Minimum
Output Voltage Logic Low (V_{OL})		1.6V _{DC} Typical, V _{CC} -1.62V _{DC} Maximum
Rise Time / Fall Time	20% to 80% of waveform	150pSec Typical, 300pSec Maximum
Duty Cycle	at 50% of waveform	50 ±5(%)
Load Drive Capability		50 Ohms into V _{CC} -2.0V _{DC}
Logic Control / Additional Output		Output Enable (OE) and Complementary Output, or Standby (ST) and Complementary Output
Output Control Input Voltage	V _{IH} of 70% of V _{CC} Minimum No Connection V _{IL} of 30% of V _{CC} Maximum	Enables Outputs Enables Outputs Disables Outputs: High Impedance
Output Enable Current	Without Load	75mA Maximum (OE)
Standby Current	Without Load	30µA Maximum (ST)
Aging	First Year at 25°C	±1ppm Maximum
Start Up Time		10 mSeconds Maximum
Period Jitter	Deterministic Random RMS pk-pk	0.2pSec Typical 2.0pSec Typical 1.5pSec Typical, 3.0pSec Maximum 20pSec Typical, 25pSec Maximum
RMS Phase Jitter (Random) Fj=637kHz to 10MHz	1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz	1.7pSec Typical 1.6pSec Typical 1.6pSec Typical
RMS Phase Jitter (Random) Fj=1MHz to 20MHz	1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz	1.4pSec Typical 1.0pSec Typical 0.7pSec Typical
RMS Phase Jitter (Random) Fj=1.875MHz to 20MHz	1.000MHz to 100.000MHz 100.001MHz to 156.250MHz 156.251MHz to 220.000MHz	1.1pSec Typical 0.5pSec Typical 0.4pSec Typical

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EMCL13

PACKAGE
PLASTIC

VOLTAGE
3.3V

CLASS
OS7P

REV. DATE
10/11

PART NUMBERING GUIDE

EMCL13 C 2 H - 155.520M TR

FREQUENCY TOLERANCE & STABILITY/ OPERATING TEMPERATURE RANGE

C=±100ppm Maximum over 0°C to +70°C
 D=±50ppm Maximum over 0°C to +70°C
 E=±25ppm Maximum over 0°C to +70°C
 F=±20ppm Maximum over 0°C to +70°C
 G=±100ppm Maximum over -40°C to +85°C
 H=±50ppm Maximum over -40°C to +85°C
 J=±25ppm Maximum over -40°C to +85°C
 L=±100ppm Maximum over -20°C to +70°C
 M=±50ppm Maximum over -20°C to +70°C
 N=±25ppm Maximum over -20°C to +70°C

AVAILABLE OPTIONS

Blank=Bulk
 TR=Tape and Reel (Standard)

FREQUENCY


LOGIC CONTROL/ADDITIONAL OUTPUT

H=Output Enable (OE) and Complementary Output
 J=Standby (ST) and Complementary Output

DUTY CYCLE

2=50±5(%)


MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

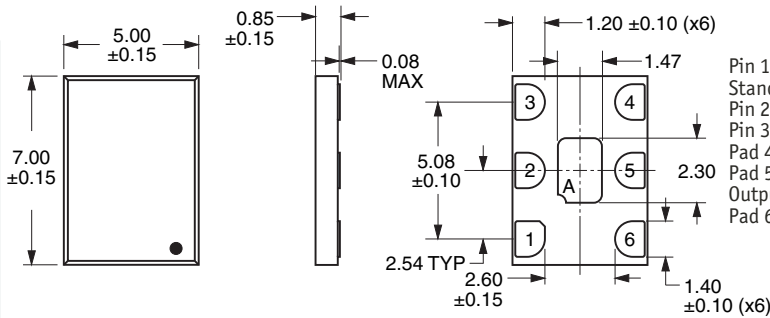

Pin 1: Output Enable (OE) or Standby (ST)
 Pin 2: No Connect
 Pin 3: Case Ground
 Pad 4: Output
 Pad 5: Complementary Output
 Pad 6: Supply Voltage


Note A: Center paddle is connected internally to oscillator ground (Pad 3).

SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

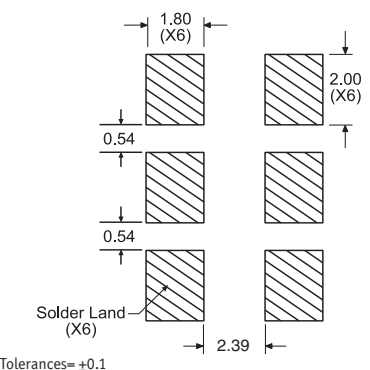


Tolerances=±0.1

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

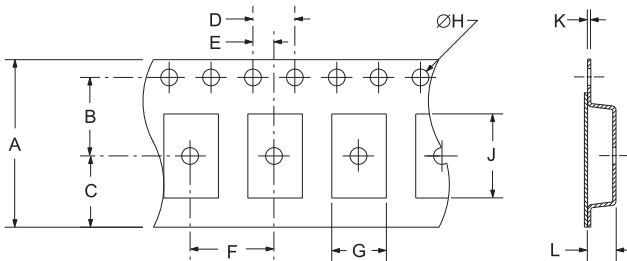

TAPE	A	B	C	D	E
	16±.3-1	7.5±.1	6.75±.1	4±.1	2±.1
F	G	H	J	K	L
8±.1	B0*	1.5+-.1-0	A0*	.3±.05	K0*

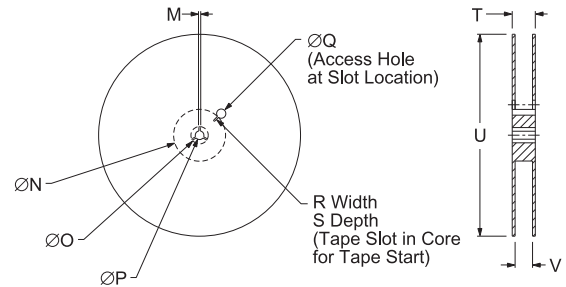

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4+2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic	Specification
ESD Susceptibility	MIL-STD-883, Method 3015, Class 2, HBM: 2000V
Flammability	UL94-V0
Mechanical Shock	MIL-STD-883, Method 2002, Condition G, 30,000G
Moisture Resistance	MIL-STD-883, Method 1004
Moisture Sensitivity Level	J-STD-020, MSL 1
Resistance to Soldering Heat	MIL-STD-202, Method 210, Condition K
Resistance to Solvents	MIL-STD-202, Method 215
Solderability	MIL-STD-883, Method 2003 (Six I/O Pads on bottom of package only)
Temperature Cycling	MIL-STD-883, Method 1010, Condition B
Thermal Shock	MIL-STD-883, Method 1011, Condition B
Vibration	MIL-STD-883, Method 2007, Condition A, 20G

MARKING SPECIFICATIONS

Line 1: XXXX or XXXXX
 Ecliptek Manufacturing Lot Code

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	EMCL13	PLASTIC	3.3V	OS7P	10/11